



Power Cool Equipments (M) Sdn Bhd
Hotline: 1700 82 1188 | 383045-D
Local Manufacturer & Supplier

AI+INVERTER



COMMERCIAL REFRIGERATOR

i·max Malaysia's Trustworthy Brand



SHOPEE/ FB/ IG: imaxrefrigerator
LAZADA/ XHS: imaxmalaysia
TIKTOK: imax.refrigerator

WEBSITE



No. 12, RCI Park Jalan Kesidang 2,
Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor Darul Ehsan, Malaysia.



MyHP00045/24




SHANGHAI
BUSINESS
since 1979





ABOUT US

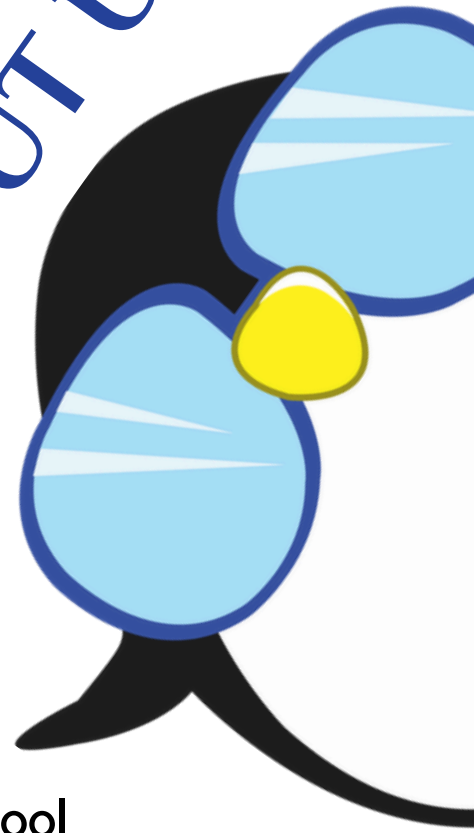

Power Cool Equipments (M) Sdn. Bhd.

is an established leading manufacturer & supplier of commercial-grade kitchen equipment that specializes in chillers, freezers and all kinds of refrigeration systems for commercial and industrial use, whereas Imax is our famous product brand in Malaysia. We also include the addition of after sales services such as installation and maintenance for all our clients. Furthermore, Hi-Ten Trading Sdn Bhd is providers as a direct retail arm of Power Cool Equipments (M) Sdn Bhd in Malaysia.

Enquiry Hotline: +6012 386 8250

Service Hotline: +6012 386 8743



- 02 About Us
- 04 Our Customer
- 05 Our Project & Our Product
 - Display Series
 - Inverter Series
 - Upright Series
 - Chiller Freezer Series
 - Counter Series
 - Chest / Island Freezer Series
 - Special Series
- 34 Certificate & Speech
- 35 Our Branch & Testimonial
- 36 Talent Hiring



CONTENTS



i-max

OUR BRANCH



KOTA KINABALU (SABAH OUTLET)

CL. 015261104 (No 38) Teck Guan Villa,
Penampang 88300, Kota Kinabalu, Sabah.

Office: +6012 386 3488
H/P: +6012 836 7688



SUNGAI BAKAP / TANAH TAMPOI (PENANG / JOHOR BAHRU OUTLET)

G1 No. 4334, Jln Lima Kongs, Kampung Lima Kongs,
14200 Sungai Bakap, Pulau Pinang.

No 22, Jln Kempas 2/3 Kws. Perindustrian Tanah
Tampoi, 81200 Johor Darul Ta'zim, JB.
Office: +604 585 0081
H/P: +6012 386 8477 (8164) (PG) / 013-922 2000 (JB)

OUR TESTIMONIAL



ALL LASTING BUSINESS IS BUILT ON FRIENDSHIP - ALFRED.A MONTAPER



2019




2020



2021




Partner up to produce meaning and value

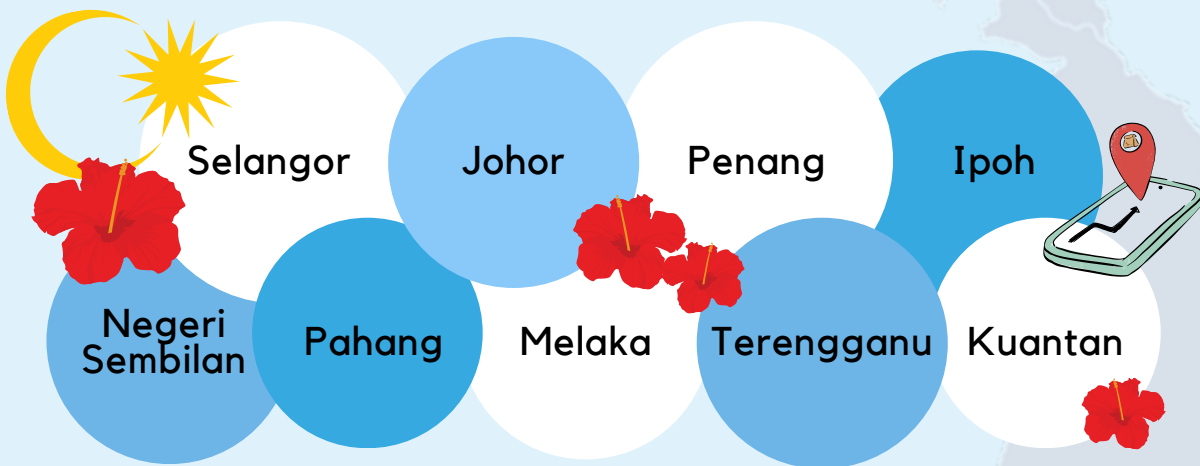

CUSTOMER

MEET OUR



i·max OUR PROJECT



OUR PRODUCTS

1. Display Series
2. Inverter Series
3. Chiller Freezer Series
4. Upright Series
5. Counter Series
6. Chest / Island Freezer Series
7. Special Series (Cold Room, Custom Made)



COLD ROOM CUSTOMIZATION

Premium Modular Cold Room Solutions



MADE IN MALAYSIA
Local Manufacturer Support



FULLY CAMLOCK SYSTEM

Easy installation &
removal system



High-Density PU Insulated Panels

Excellent thermal
insulation performance



DIGITAL CONTROLLER

Precise temperature
range for different
storage needs



High-Performance Imported Compressor

Energy-efficient &
reliable performance

❄ OUR CORE SOLUTIONS ❄



DISPLAY
COLD ROOM



WALK-IN
COLD ROOM



PORTABLE
COLD ROOM



SLIDING DOOR
COLD ROOM



PORTABLE COLD ROOM



BUILT FOR
PERFORMANCE
MADE TO LAST

Flexible Cold Storage Solution



SUITABLE FOR

- ✓ Restaurant
- ✓ Cafe
- ✓ Bakery
- ✓ Mini Market
- ✓ Grocery Store
- ✓ Central Kitchen
- ✓ Catering Service
- ✓ Meat & Seafood Supplier
- ✓ Frozen Food Supplier



Restaurant



Cafe



Bakery



Mini Market



Grocery Store



Central Kitchen



Catering Service



Meat & Seafood



Frozen Food

KEY FEATURES

- ⊗ High Density PU Insulated Panels
- ⊗ Durable Chequered Plate Floor
- Ⓛ Heavy Duty Cold Room Door
- ⊕ LED Internal Lighting
- Ⓛ Digital Temperature Controller
- ⊗ Energy-Efficient Condensing Unit
- ⊗ Easy Installation & Maintenance (Single Phase)

COOLING SYSTEM OPTIONS

CHILLER SYSTEM

0°C ~ 10°C



Vegetables, Drinks,
Dairy

FREEZER SYSTEM

-10°C ~ -18°C



Meat, Seafood,
Frozen Food



WARRANTY
ON COMPRESSOR
& PARTS

*Terms & Conditions Apply

WHY CHOOSE US?

FEATURES	OTHERS	PORTABLE COLD ROOM
Installation Placing	Permanent	Moveable
Relocate	Hard	Easy
Duration of Setup	Taking Time	Soon as possible
Construction	Expensive	Doesn't Need
Flexibility	Low	High
Cost	High	Cost Effective
Maintenance	Complicated	Easy

COLD ROOM DIMENSION

MODEL	DIMENSION (L x W x H)
PC-PCR-477	4ft x 7ft x 7ft
PC-PCR-577	5ft x 7ft x 7ft
PC-PCR-677	6ft x 7ft x 7ft

*Special request, customizing size are available



ENERGY
SAVING



DURABLE
& RELIABLE



EASY
MAINTENANCE



FASTER
COOLING

i·max

DISPLAY SERIES



Suitable for drinks, fruits, vegetables, flowers and etc.



Economy

* Only Chiller *

- | | |
|---------|-------------------|
| 1 DOOR | IMAX-CII |
| 2 DOORS | TINNY-2DC-PVW/PTW |
| 3 DOORS | TINNY-3DC-PVW/PTW |

Standard

INVERTER *Chiller / Freezer*

- | | |
|---------|---|
| 2 DOORS | TINNY-IVT-2DC/F
(W-White/ B-Black/ BB-All Black) |
| 3 DOORS | TINNY-IVT-3DC/F
(W-White/ B-Black/ BB-All Black) |



Premium

INVERTER * Chiller * * Freezer *

- | | | |
|---------|-------------|-------------|
| 1 DOOR | ECO-IVT-1DC | ECO-IVT-1DF |
| 2 DOORS | ECO-IVT-2DC | ECO-IVT-2DF |
| 3 DOORS | ECO-IVT-3DC | ECO-IVT-3DF |

Don't worry, just
let me know your
concern!



ec
friendly R290



Economy - Best Selling



Standard (Inverter)
New Business Best Choice



Premium (Inverter)
Chain Stores Preferred

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



ECONOMY 1 DOOR DISPLAY CHILLER



BEST SELLING

*All photos shown for reference purposes only.

CHILLER

MODEL	SC-250
DIMENSION (EXT.) MM	545 x 620 x 1727
CAPACITY (L)	250
SHELVING	4 PCS
WEIGHT (KG)	63.5
REFRIGERANT	R600a
TEMPERATURE (°C)	0 ~ 10
ENERGY CONSUMPTION	1.4 kWh/ 24h
POWER INPUT	220 W
TEST CONDITION	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz
STANDARD FEATURES	- Adjustable Thermostat - Blower System (Auto Defrost) - Non-Heater Glass (May cause water condensation) - Hot Air Blow (reduce water condensation on glass door) - Lock & Key - Adjustable Feet (4 castor & 2 feet) - Energy Saving LED



*Energy consumption was tested in testing lab with light on.** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



STANDARD DISPLAY CHILLER / FREEZER SERIES



BEST SELLING

IMAX-CI1 (WHITE)
IMAX-CI1B (BLACK)

*All photos shown for reference purposes only.

CHILLER

MODEL	IMAX-CI1/B
DIMENSION (EXT.) MM	615 x (590+50+40) x 1925
DIMENSION (INT.) MM	553 x 477 x 1498
CAPACITY (L)	395
SHELVING	533*390 (MM) x 4 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)
WEIGHT (KG)	62
REFRIGERANT	R290
TEMPERATURE (°C)	2 ~ 8
ENERGY CONSUMPTION	4.76 kWh/ 24h
POWER INPUT	296 W
TEST CONDITION	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz
STANDARD FEATURES	- Digital Controller - Blower System (Auto Defrost) - Heater Line Glass (Prevent Water Condensation) - Length of Wire (3 Meter) Wire Length: 3m 

*Energy consumption was tested in testing lab with light on.** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



PREMIUM DISPLAY CHILLER / FREEZER SERIES



BEST SELLING

*All photos shown for reference purposes only.

CHILLER

FREEZER

MODEL	HSB-IDC	HSB-IDF
DIMENSION (EXT.) MM	630 x (805+50+40) x 2072	630 x (805+50+40) x 2072
DIMENSION (INT.) MM	555 x 642 x 1466	555 x 642 x 1466
CAPACITY (L)	522	522
SHELVING	584*533 (MM) x 5 PCS (IRON CLIP)	584*533 (MM) x 5 PCS (IRON CLIP)
WEIGHT (KG)	82	90
REFRIGERANT	R290	R290
TEMPERATURE (°C)	2 ~ 8	-10 ~ -18
ENERGY CONSUMPTION	5.24 kWh/ 24h	11.74 kWh/ 24h
POWER INPUT	340 W	400 W
TEST CONDITION	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	- Digital Controller - Blower System (Auto Defrost) - Heater Tempered Glass (Prevent Water Condensation) - Length of Wire (3 Meter)	

Wire Length: 3m



*Energy consumption was tested in testing lab with light on.** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



ECONOMY CGS DISPLAY CHILLER SERIES



*All photos shown for reference purposes only.

CHILLER

MODEL	CGS-700-W/BW
DIMENSION (EXT.) MM	910 x (636 + 55) x 1965
DIMENSION (INT.) MM	805 x 533 x 1535
CAPACITY (L)	658
SHELVING	10 PCS (Stainless Steel Shelving)
WEIGHT (KG)	95
REFRIGERANT	R290
TEMPERATURE (°C)	+2 to +8
ENERGY CONSUMPTION	5.69 kw/ 24H
POWER INPUT (W)	325
AMPERE (A)	1.9
VOLTAGE/ FREQUENCY	220-240V/50Hz
STANDARD FEATURES	- Digital Controller (temperature display) - Blower System (Auto Defrost) - Non-Heater Glass (may naturally form water condensation in high-humidity environments (75%+))

Wire Length: 3m



*Energy consumption was tested in testing lab with light on.** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



ECONOMY DISPLAY CHILLER (PIPING SYSTEM)



PIPING SYSTEM



FOR VEGE & FRUIT SELLER

*All photos shown for reference purposes only.

CHILLER

MODEL	IMAX-VP-362 (3 DOORS)	IMAX-VP-462 (4 DOORS)
DIMENSION (EXT.) MM	1845 x 835 x 2035	2410 x 835 x 2035
DIMENSION (INT.) MM	1702 x 575 x 1430	2310 x 575 x 1430
COOLING CAPACITY (L)	1395	1900
SHELVING	(SIDE) 533*483 (MM) x 8 PCS (CENTER) 584*483 (MM) x 4 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)	533*483 (MM) x 16 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)
WEIGHT (KG)	178	197
REFRIGERANT	R290	R290
TEMPERATURE (°C)	4 ~ 10	4 ~ 10
ENERGY CONSUMPTION	8 kW/ 24h	10 kw/24H
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	- Non-Heater Glass (may naturally form water condensation in high-humidity environments (75%+)) - Piping System (Manual Defrost) - Thermostat Controller - Signboard Sticker (Add On)	

Wire Length: 3m



*Energy consumption was tested in testing lab with light on.** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



ECONOMY TINNY DISPLAY CHILLER SERIES



*All photos shown for reference purposes only.

CHILLER

MODEL	TINNY-2DC-PVW (2 DOORS)	TINNY-3DC-PVW (3 DOORS)
DIMENSION (EXT.) MM	1212 x (635+50) x 2000	1830 x (635+50) x 2000
DIMENSION (INT.) MM	1118 x 530 x 1535	1740 x 530 x 1535
CAPACITY (L)	910	1415
SHELVING	533 * 390 (MM) 1 DIVIDER x 10 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)	(SIDE) 533 * 390 (MM) 1 DIVIDER x 10 PCS (CENTER) 584 * 390 (MM) 1 DIVIDER x 5 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)
WEIGHT (KG)	160	175
REFRIGERANT	R290	R290
TEMPERATURE (°C)	2 ~ 8	2 ~ 8
ENERGY CONSUMPTION	9.45 kWh/ 24H	10.56 kWh/ 24H
POWER INPUT	400 W	485 W
TEST CONDITION	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	• Non-Heater Glass (may naturally form water condensation in high-humidity environments (75%+)) • 360-Degree Movable Wheels (Front with Brake) • Blower System (Automatic Defrost) Frost-Free • Built-in Handle • Digital Controller	

Wire Length: 3m



*Energy consumption was tested in testing lab with light on, without frequently open and close door. ** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



STANDARD TINNY DISPLAY CHILLER SERIES



W - White



B - Black



BB - All Black
Special Made



*All photos shown for reference purposes only.

CHILLER

MODEL	TINNY-2DC-TW/B/BB (2 DOORS)	TINNY-3DC-TWB/BB (3 DOORS)
DIMENSION (EXT.) MM	1212 x (635+50+40) x 2000	1830 x (635+50+40) x 2000
DIMENSION (INT.) MM	1118 x 530 x 1535	1740 x 530 x 1535
CAPACITY (L)	910	1415
SHELVING	533 * 390 (MM) 1 DIVIDER x10 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)	(SIDE) 533 * 390 (MM) 1 Divider x10 PCS (CENTER) 584 * 390 (MM) 1 Divider x5 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)
WEIGHT (KG)	160	175
REFRIGERANT	R290	R290
TEMPERATURE (°C)	2 ~ 8	2 ~ 8
ENERGY CONSUMPTION	9.8 kWh/ 24H	14.6 kWh/ 24H
POWER INPUT	479 W	784 W
TEST CONDITION	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	- Heater Tempered Glass (Avoid Water Condensation) 360-Degree Movable Wheels (Front with Brake) 13A Power Point - Blower System (Automatic Defrost)	

Wire Length: 3m



Energy consumption was tested in testing lab with light on, without frequently open and close door. * All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



STANDARD TINNY DISPLAY CHILLER SERIES



W - White



B - Black



*All photos shown for reference purposes only.

CHILLER

MODEL	TINNY-4DC-TW/B (4 DOORS)
DIMENSION (EXT.) MM	2434 x (630 + 50 + 40) x 2000
DIMENSION (INT.) MM	2310 x 525 x 1535
CAPACITY (L)	1900
SHELVING	533 * 390 (MM) 1 DIVIDER x 16 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)
WEIGHT (KG)	320
REFRIGERANT	R290
TEMPERATURE (°C)	2 ~ 8
ENERGY CONSUMPTION	18.85 kWh/ 24H
POWER INPUT	1100 W
TEST CONDITION	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz
STANDARD FEATURES	• Heater Tempered Glass (Avoid Water Condensation) • 360-Degree Movable Wheels (Front with Brake) • 13A Power Point • Blower System (Automatic Defrost)

Wire Length: 3m



Energy consumption was tested in testing lab with light on, without frequently open and close door. * All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

STANDARD DISPLAY SERIES

i-max



SIRIM
CERTIFIED TO ISO 9001:2015
CERT. NO.: QMS 03504



W - White

B - Black

BB - All Black *Special Made*



HIGHLY
RECOMMENDED
(WORTH TO BUY)

*Height will extra 51mm after included Condenser on the top

*All photos shown for reference purposes only.

CHILLER

MODEL	IMAX-CI262 W/B/BB (2 DOORS)	IMAX-CI362 W/B/BB (3 DOORS)
DIMENSION (EXT.) MM	1223 x 835 x 2035	1845 x 835 x 2035
DIMENSION (INT.) MM	1130 x 572 x 1547	1702 x 572 x 1547
CAPACITY (L)	1000	1506
SHELVING (PCS)	10	15
WEIGHT (KG)	140	150
REFRIGERANT	R290	R290
TEMPERATURE (°C)	0 ~ 10	0 ~ 10
VOLTAGE/ FREQUENCY (V/Hz)	220-240V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	10	18
STANDARD FEATURES	• Heater Tempered Glass Door (Avoid Water Condensation) • Auto Defrost (Frost-Free) • R290 Energy Saving Gas • Digital Controller	

Wire Length: 3m



Energy consumption was tested with light on & calculated in commercial rate. All sizes +/- 3mm *



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)

1 YEAR WARRANTY

3 YEARS WARRANTY



PREMIUM DISPLAY CHILLER / FREEZER SERIES



**CHAIN STORES
PREFERRED**

*All photos shown for reference purposes only.

CHILLER

FREEZER

MODEL	HSB-2DC	HSB-3DC	HSB-2DF	HSB-3DF
DIMENSION (EXT.) MM	1258 x (770+55+40) x 2055	1880 x (770+55+40) x 2055	1258 x (770+55+40) x 2055	1880 x (770+55+40) x 2055
DIMENSION (INT.) MM	1115 x 638 x 1505	1740 x 638 x 1880	1115 x 638 x 1505	1740 x 638 x 1880
CAPACITY (L)	1070	1675	1070	1675
SHELVING	10	15	10	15
WEIGHT (KG)	220	300	240	350
REFRIGERANT	R290	R290	R290	R290
TEMPERATURE (°C)	0 ~ 10	0 ~ 10	-10 to -20	-10 to -20
TEST CONDITION	32°C, 60% RH	32°C, 60% RH	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION	14 kWh/ 24h	19 kWh/ 24h	26 kWh/ 24h	43 kWh/ 24h
STANDARD FEATURES	• Heater Tempered Glass • Auto Defrost • Digital Controller • 13A Socket		• Triple Layer Heater Glass • Auto Defrost • Digital Controller • 13A Socket	

Wire Length: 3m

Wire Length: 3m

*Energy consumption was tested in testing lab with light on.** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)

1 YEAR WARRANTY

3 YEARS WARRANTY



PREMIUM KK BIG DISPLAY SERIES



2 Door

4
Wheels

4
Legs

3 Door

6
Wheels

6
Legs



*All photos shown for reference purposes only.

CHILLER

FREEZER

MODEL	BB-2DCW	BB-3DCW	BB-2DFW	BB-3DFW
DIMENSION (EXT.) MM	1435 x 815 x 2413	2140 x 815 x 2413	1435 x 815 x 2413	2140 x 815 x 2413
DIMENSION (INT.) MM	1325 x 625 x 1880	2030 x 625 x 1880	1325 x 625 x 1880	2030 x 625 x 1880
CAPACITY (L)	1580	2400	1580	2400
SHELVING	635*533 (MM) x 14 PCS (EACH SHELVING WITH 4 IRON CLIP)	635*533 (MM) x 21 PCS (EACH SHELVING WITH 4 IRON CLIP)	635*533 (MM) x 14 PCS (EACH SHELVING WITH 4 IRON CLIP)	635*533 (MM) x 21 PCS (EACH SHELVING WITH 4 IRON CLIP)
WEIGHT (KG)	220	300	240	350
REFRIGERANT	R290	R290	R290	R290
TEMPERATURE (°C)	2 ~ 8	2 ~ 8	-14 ~ -18	-14 ~ -18
TEST CONDITION	32°C, 60% RH	32°C, 60% RH	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION	18.7 kWh/ 24h	25.4 kWh/ 24h	35 kWh/ 24h	57 kWh/ 24h
STANDARD FEATURES	- Heater Tempered Glass - Auto Defrost - Digital Controller 15A Socket		- Heater Tempered Glass - Auto Defrost - Digital Controller 15A Socket	

Wire Length: 3m



Wire Length: 3m



*Energy consumption was tested in testing lab with light on. ** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



CAKE SHOWCASE CHILLER (RECTANGULAR)



COLORBOND BASE (Black/White)

Specification Notes:

- Stainless Steel Body is standard specification
- 3ft & 4ft models are equipped with Black Plastic Sliding Door Frames
- 5ft & 6ft models are equipped with Silver Aluminium Sliding Door Frames



*All photos shown for reference purposes only.

MODEL	EQ-3FTCC2	EQ-4FTCC2	EQ-5FTCC2	EQ-6FTCC2
DIMENSION (EXT.) MM	900 x 700 x 1380	1200 x 700 x 1380	1500 x 700 x 1380	1800 x 700 x 1380
DIMENSION (INT.) MM	854 x 597 x 812	1152 x 597 x 812	1454 x 597 x 812	1754 x 597 x 812
CAPACITY (L)	414	558	705	850
CASTOR (PCS)	4	4	4	4
SHELVING	2 TIER	2 TIER	2 TIER	2 TIER
REFRIGERANT	R290	R290	R290	R290
TEMPERATURE (°C)	2 ~ 8	2 ~ 8	2 ~ 8	2 ~ 8
VOLTAGE/ FREQUENCY (V/Hz)	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
ENERGY CONSUMPTION (kWh/ 24h)	5.9	6.5	8.7	9.7
STANDARD FEATURES	- Auto Defrost (Blower System) - Sliding Glass Door (Non-Heater Glass - may form water condensation) 4-Side Heater Tempered Glass (Avoid Water condensation) - With Brake Castor (Front only) - Adjustable Shelving - Stainless Steel Base (Internal)			

Wire Length: 3m

*Energy consumption was tested in testing lab with light on.** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED



Inverter technology in commercial refrigerators offers several advantages compared to traditional refrigeration systems. Here are some **benefits of inverter commercial refrigerators**:

ENERGY EFFICIENCY

Variable speed compressors save energy by adjusting to demand.



TEMPERATURE CONTROL

Precise temperature management preserves product quality.



QUIET OPERATION

Low noise levels due to smooth compressor operation.



COST SAVINGS

Lower monthly energy bills outweigh initial investment.



FASTER COOLING RESPONSE

Quick temperature recovery for busy commercial settings.



ENVIRONMENTAL FRIENDLINESS

Lower energy consumption contributes to reduced emissions.



These advantages make inverter refrigerators a compelling choice for businesses seeking improved performance and sustainability in their refrigeration systems.

EXTENDED COMPRESSOR LIFESPAN

Reduced wear and tear lead to longer compressor life.



1. **Inverter refrigerators** use a variable speed compressor that adjusts its speed based on the cooling demand. This results in significant energy savings compared to traditional compressors that operate at a fixed speed. The ability to modulate the compressor speed allows the refrigerator to operate at lower capacities during periods of lower demand, leading to reduced energy consumption.
2. **AI+ Inverter technology** enables precise control over the compressor speed, allowing for more accurate temperature regulation. This helps in maintaining a consistent and optimal temperature inside the refrigerator, preserving the quality of stored items.
3. **Inverters produce** less noise during operation because the compressor doesn't need to start and stop frequently. This can be particularly beneficial in commercial settings where a quieter environment is desired.
4. Although inverter refrigerators may have a higher upfront cost, the long-term energy savings often outweigh the initial investment. Businesses can benefit from lower monthly energy bills, contributing to overall cost savings.
5. **Inverter compressors** respond more quickly to changes in temperature, ensuring faster cooling and quicker recovery after the door has been opened. This is especially important in busy commercial environments where the refrigerator is accessed frequently.
6. By operating more efficiently and consuming less energy, inverter refrigerators contribute to lower greenhouse gas emissions. This aligns with environmental sustainability goals and may also lead to cost savings in regions where energy consumption is tied to carbon emissions.
7. The gradual start and stop of the compressor, as opposed to abrupt on/off cycles, result in reduced wear and tear. This extended lifespan can lead to lower maintenance costs for the refrigerator.



HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)

1 YEAR WARRANTY

3 YEARS WARRANTY



STANDARD INVERTER DISPLAY CHILLER SERIES



W - White



B - Black



MyHP00157/24
TINNY-IVT-3DC

AI+INVERTER



**SAVE UP TO
RM 1,350
/ YEAR**
Estimated Electricity Saving



**SAVE UP TO
RM 1,500
/ YEAR**
Estimated Electricity Saving

*All photos shown for reference purposes only.

CHILLER

MODEL	TINNY-IVT-2DCW/B/BB (2 DOORS)	TINNY-IVT-3DCW/B/BB (3 DOORS)
DIMENSION (EXT.) MM	1212 x (625+50+40) x 2026	1834 x (625+50+40) x 2026
DIMENSION (INT.) MM	1118 x 530 x 1535	1740 x 530 x 1535
CAPACITY (L)	910	1415
SHELVING	533 * 390 (MM) 1 DIVIDER x10 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)	(SIDE) 533 * 390 (MM) 1 Divider x10 PCS (CENTER) 584 * 390 (MM) 1 Divider x5 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)
WEIGHT (KG)	160	175
REFRIGERANT	R290	R290
TEMPERATURE (°C)	2 ~ 8	2 ~ 8
COMPRESSOR TYPE	VARIABLE SPEED (INVERTER)	VARIABLE SPEED (INVERTER)
ENERGY CONSUMPTION	1.9 kWh/ 24H	2.2 kWh/ 24H
POWER INPUT	215 W	230 W
TEST CONDITION	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	- Low-E Glass (may naturally form water condensation in high-humidity environments (75%+) 3 inch Castor (front with brake) - Auto Defrost (Blower System)	

Wire Length: 3m

*Actual power consumption may vary depending on usage conditions. ** All sizes +/- 5mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)

1 YEAR WARRANTY

3 YEARS WARRANTY



STANDARD INVERTER DISPLAY FREEZER SERIES



W - White



B - Black

AI+INVERTER



*All photos shown for reference purposes only.

FREEZER

MODEL	TINNY-IVT-2DFW/B/BB (2 DOORS)	TINNY-IVT-3DFW/B/BB (3 DOORS)
DIMENSION (EXT.) MM	1212 x (625+50+40) x 2026	1834 x (625+50+40) x 2026
DIMENSION (INT.) MM	1118 x 530 x 1535	1740 x 530 x 1535
CAPACITY (L)	910	1415
SHELVING	533 * 390 (MM) 1 DIVIDER x10 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)	(SIDE) 533 * 390 (MM) 1 Divider x10 PCS (CENTER) 584 * 390 (MM) 1 Divider x5 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)
WEIGHT (KG)	160	175
REFRIGERANT	R290	R290
TEMPERATURE (°C)	-14 ~ -18	-14 ~ -18
COMPRESSOR TYPE	VARIABLE SPEED (INVERTER)	VARIABLE SPEED (INVERTER)
ENERGY CONSUMPTION	13.4 kWh/ 24H	14.1 kWh/ 24H
POWER INPUT	660 W	900 W
TEST CONDITION	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	- Low-E Glass (may naturally form water condensation in high-humidity environments (75%+)) 2 in 1 Castor Leg - Auto-defrost (Frost-Free)	

Wire Length: 3m



*Actual power consumption may vary depending on usage conditions. ** All sizes +/- 5mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



PREMIUM 1 DOOR INVERTER DISPLAY CHILLER/FREEZER




**CHAIN STORES
PREFERRED**

AI+INVERTER



*All photos shown for reference purposes only.

CHILLER

FREEZER

MODEL	ECO-IVT-IDC (CHILLER)	ECO-IVT-IDF (FREEZER)
DIMENSION (EXT.) MM	630 x (805+50+40) x 2072	630 x (805+50+40) x 2072
DIMENSION (INT.) MM	555 x 642 x 1466	555 x 642 x 1466
CAPACITY (L)	522	522
SHELVING (PCS)	584*533 (MM) x 5 PCS (IRON CLIP)	584*533 (MM) x 5 PCS (IRON CLIP)
WEIGHT (KG)	103	103
REFRIGERANT	R290	R290
TEMPERATURE (°C)	2 ~ 8	-14 ~ -18
COMPRESSOR TYPE	VARIABLE SPEED (INVERTER)	VARIABLE SPEED (INVERTER)
ENERGY CONSUMPTION	2.5 kWh/ 24H	6 kWh/ 24H
POWER INPUT	198 W	590 W
TEST CONDITION	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	• Low-E Glass (may naturally form water condensation in high-humidity environments (75%+)) • 2 in 1 Castor Leg x4 • Digital Controller • Auto-defrost (Frost-Free)	

Wire Length: 3m



*Actual power consumption may vary depending on usage conditions. ** All sizes +/- 5mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



PREMIUM 2 DOOR INVERTER DISPLAY CHILLER/FREEZER



CHAIN STORES
PREFERRED

AI+INVERTER



*All photos shown for reference purposes only.

CHILLER

FREEZER

MODEL	ECO-IVT-2DC (CHILLER)	ECO-IVT-2DF (FREEZER)
DIMENSION (EXT.) MM	1258 x (770+55+40) x 2055	1258 x (770+55+40) x 2055
DIMENSION (INT.) MM	1115 x 638 x 1505	1115 x 638 x 1505
CAPACITY (L)	1070	1070
SHELVING (PCS)	533*533 (MM) x 10 PCS (IRON CLIP)	533*533 (MM) x 10 PCS (IRON CLIP)
WEIGHT (KG)	205	225
REFRIGERANT	R290	R290
TEMPERATURE (°C)	2 ~ 8	-14 ~ -18
COMPRESSOR TYPE	VARIABLE SPEED (INVERTER)	VARIABLE SPEED (INVERTER)
ENERGY CONSUMPTION	2.9 kWh/ 24H	9.1 kWh/ 24H
POWER INPUT	320 W	615 W
TEST CONDITION	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	- Low-E Glass (may naturally form water condensation in high-humidity environments (75%+)) 2 in 1 Castor Leg x4 - Blower System (Auto-defrost)	

Wire Length: 3m



*Actual power consumption may vary depending on usage conditions. ** All sizes +/- 5mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)

1 YEAR
WARRANTY

3 YEARS
WARRANTY



PREMIUM 3 DOOR INVERTER DISPLAY CHILLER/FREEZER



CHAIN STORES
PREFERRED



MyHP00045/24
Chiller



MyHP00156/24
Freezer



AI+INVERTER

i-max

*All photos shown for reference purposes only.

CHILLER

FREEZER

MODEL	ECO-IVT-3DC (CHILLER)	ECO-IVT-3DF (FREEZER)
DIMENSION (EXT.) MM	1880 x (770+55+40) x 2055	1880 x (770+55+40) x 2055
DIMENSION (INT.) MM	1740 x 638 x 1880	1740 x 638 x 1880
CAPACITY (L)	1675	1675
SHELVING (PCS)	552*533 (MM) x 15 PCS (IRON CLIP)	552*533 (MM) x 15 PCS (IRON CLIP)
WEIGHT (KG)	270	275
REFRIGERANT	R290	R290
TEMPERATURE (°C)	2 ~ 8	-14 ~ -18
COMPRESSOR TYPE	VARIABLE SPEED (INVERTER)	VARIABLE SPEED (INVERTER)
ENERGY CONSUMPTION	3.26 kWh/ 24h	13.2 kWh/ 24h
POWER INPUT	331 W	966 W
TEST CONDITION	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	• Low-E Glass (may naturally form water condensation in high-humidity environments (75%+)) • 2 in 1 Castor Leg x4 (Adjustable Leg x1 at middle) • Blower System Auto-defrost • Digital Controller	

Wire Length: 3m



*Actual power consumption may vary depending on usage conditions. ** All sizes +/- 5mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



PREMIUM 4 DOOR INVERTER UPRIGHT FREEZER



AI+INVERTER



Freezer

*All photos shown for reference purposes only.

FREEZER

MODEL	EQ-IVT-4DUPF
DIMENSION (EXT.) MM	1240 x 740 x (1960+40)
DIMENSION (INT.) MM	1118 x 570 x 1530
COOLING CAPACITY (L)	975
SHELVING (PCS) SIZE IN MM	533*521 (MM) x 6 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)
REFRIGERANT	R290
TEMPERATURE (°C)	-18 ~ -25
TEST CONDITION	32°C, 60% RH
ENERGY CONSUMPTION	4.97 kWh/ 24h
VOLTAGE/ FREQUENCY	220V/50Hz
PLUG	15A
STANDARD FEATURES	• Magnetic Solid Door • Blower System (Auto Defrost) - Condensing Set • Digital Controller • Energy Saving R290 GAS, Fast Cooling, Energy Efficiency • AI+ Inverter Energy Saving Technology

Wire Length: 3m



*Actual power consumption may vary depending on usage conditions. ** All sizes +/- 5mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



PREMIUM INVERTER CAKE CHILLER SERIES



AI+INVERTER

- BLACK COLOR BASE
- WHITE COLOR BASE
- S/STEEL COLOR BASE

*All photos shown for reference purposes only.

CHILLER

MODEL	EQ-IVT-4FTCC2
DIMENSION (EXT.) MM	1200 x 700 x 1380
DIMENSION (INT.) MM	1136 x 590 x 725
COOLING CAPACITY (L)	486
SHELVING (PCS)	2 Layers
REFRIGERANT	R290
TEMPERATURE (°C)	2 - 8
TEST CONDITION	32°C, 60% RH
ENERGY CONSUMPTION	4.85 kWh/ 24h
VOLTAGE/ FREQUENCY	220V/50Hz
POWER INPUT	550W
STANDARD FEATURES	• Non-Heater Glass (Sliding Door may naturally form water condensation in high-humidity environments (75%+) • Blower System (Auto Defrost) • Digital Controller • AI+INVERTER Technology system • 4-side Heater glass

Wire Length: 3m

*Actual power consumption may vary depending on usage conditions. ** All sizes +/- 5mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



INVERTER S/STEEL COUNTER CHILLER/FREEZER



(2 DOORS)

EQ-IVT-1200CCM / CFM

EQ-IVT-1500CCM / CFM

EQ-IVT-1800CCM / CFM

AI+INVERTER



WITH PLASTIC
SHEET PROTECTION
(WHITE COLOUR)

CCM (C) = Chiller
CFM (F) = Freezer

(3 DOORS)

EQ-IVT-2100CCM / CFM

*All photos shown for reference purposes only.

MODEL	EQ-IVT-1200CCM / CFM	EQ-IVT-1500CCM / CFM	EQ-IVT-1800CCM / CFM	EQ-IVT-2100CCM / CFM
DIMENSION (EXT.) MM	1200 x 750 x 850	1500 x 750 x 850	1800 x 750 x 850	2100 x 750 x 850
DIMENSION (INT.) MM	715 x 575 x 575	1120 x 575 x 575	1290 x 575 x 575	1600 x 575 x 575
CAPACITY (L)	236	370	427	529
SHELVING (PCS/ SIZE)	2 / 330 x 559 (MM)	2 / 483 x 559 (MM)	2 / 635 x 559 (MM)	3/ 526 x 559 (MM)
WEIGHT (KG)	84	90	96	102
REFRIGERANT	R290	R290	R290	R290
TEMPERATURE (°C)	(C) 0~ 5 (F) -15 ~ -18	(C) 0~ 5 (F) -15 ~ -18	(C) 0~ 5 (F) -15 ~ -18	(C) 0~ 5 (F) -15 ~ -18
POWER INPUT (W)	(C) 260 (F) 300	(C) 265 (F) 330	(C) 275 (F) 340	TBC
TEST CONDITION	32°C, 60% RH	32°C, 60% RH	32°C, 60% RH	32°C, 60% RH
ENERGY CONSUMPTION (kWh/ 24h)	(C) 2.5 (F) 3.1	(C) 2.6 (F) 3.55	(C) 2.9 (F) 4.8	(C) 3.5 (F) 3.89
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	• Magnetic Solid Door • Auto Defrost • Digital Controller • Stainless Steel 430			• Swivel Castor (Front with Brake) • Compressor Part at right side (left side upon request) • Use 13A socket only • BULLET FEET (ADD ON CHARGES) Wire Length: 3m 

*Actual power consumption may vary depending on usage conditions. ** All sizes +/- 5mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED



UPRIGHT SERIES

Suitable for meats, drinks, sauce, vegetables and etc.

Chiller (C)

Freezer (F)

Chiller Freezer (CF)



2 Door

EQB-2DUPC

EQB-2DUPF

4 Door

EQB-4DUPC

EQB-4DUPF

EQ-SD-4DUPCF

6 Door

EQB-6DUPC

EQB-6DUPF

EQ-SD-4DUPCF



*All photos shown for reference purposes only.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED



HI-TEN TRADING SDN BHD (709676-X).

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



S/STEEL UPRIGHT CHILLER / FREEZER SERIES



*All photos shown for reference purposes only.

MODEL	EQB-2DUPC/F	EQB-4DUPC/F	EQB-6DUPC/F
DIMENSION (EXT.) MM	665 x (740+50) x (1960+40)	1240 x (740+50) x (1960+40)	1840 x (740+50) x (1960+40)
DIMENSION (INT.) MM	545 x 570 x 1525	1118 x 570 x 1530	1740 x 570 x 1480
CAPACITY (L)	473	975	1468
SHELVING	533*521 (MM) x 3 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)	533*483 (MM) x 6 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)	533*483 (MM) x 6 PCS 584*583 (MM) x3 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)
REFRIGERANT	R290	R290	R290
TEMPERATURE (°C) * TOLERANCE +/- 2°C *	(C) 2 ~ 8 (F) -14 ~ -20	(C) 2 ~ 8 (F) -14 ~ -20	(C) 2 ~ 8 (F) -14 ~ -20
POWER INPUT	(C) 220W / (F) 250W	(C) 280W / (F) 520W	(C) 420W / (F) 865W
TEST CONDITION	32°C, 60% RH	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION (kWh/ 24h)	(C) 3.5 / (F) 5.4	(C) 4.5 / (F) 10.5	(C) 6.5 / (F) 14
PLUG	(C) 13A / (F) 15A	(C) 13A / (F) 15A	(C) 13A / (F) 15A
STANDARD FEATURES	- Magnetic Solid Door - Blower System (Auto Defrost) - Digital Controller		

Wire Length: 3m

*Energy consumption was tested in testing lab.** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X).

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator



1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



S/STEEL UPRIGHT CHILLER FREEZER COMBO SERIES



*Customize Product, Order lead time 14-25 days



*All photos shown for reference purposes only.

MODEL	EQB-SD-4DUPCF	EQB-SD-6DUPCF
DIMENSION (EXT.) MM	1240 x (740+50) x (1960+40)	1840 x (740+50) x (1960+40)
DIMENSION (INT.) MM	1118 x 570 x 1530	1740 x 570 x 1480
CAPACITY (L)	945	1438
SHELVING	533*483 (MM) x 6 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)	533*483 (MM) x 6 PCS 584*583 (MM) x3 PCS (EACH SHELVING WITH 4 PLASTIC CLIP)
REFRIGERANT	R290	R290
TEMPERATURE (°C) * TOLERENCA +/- 2°C *	(F) -14 ~ -18 (C) 2 ~ 8	(F) -14 ~ -18 (C) 2 ~ 8
TEST CONDITION	32°C, 60% RH	32°C, 60% RH
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION (kWh/ 24h)	9.4	10.5
STANDARD FEATURES	- Magnetic Solid Door - Blower System (Auto Defrost) - Digital Controller - Swivel Castor (Front With Brake)	

Wire Length: 3m

*Energy consumption was tested in testing lab.** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

COUNTER SERIES

Suitable for meats, drinks, sauce, vegetables and etc.

2 Door ** Freezer **
(1.2M) YD-1200CFM



2 Door ** Chiller / Freezer **
Inverter or Non-Inverter
(1.2M) EQB-1200CCM/ CFM
(1.5M) EQB-1500CCM/ CFM
(1.8M) EQB-1800CCM/ CFM

3 Door ** Chiller / Freezer **
Inverter or Non-Inverter
(2.1M) EQB-2100CCM/ CFM



**All photos shown for reference purposes only.*

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL + 3 YEARS COMPRESSOR (T&C APPLY)



S/STEEL COUNTER CHILLER / FREEZER SERIES



(2 DOORS)

EQB-1200CCM / CFM

EQB-1500CCM / CFM

EQB-1800CCM / CFM

CCM (C) = Chiller
CFM (F) = Freezer



WITH PLASTIC
SHEET PROTECTION
(WHITE COLOUR)

(3 DOORS)
EQB-2100CCM / CFM



OPTIONAL

GLASS DOOR



BACKSPLASH



FOOD PAN



RACKING



*All photos shown for reference purposes only.

MODEL	EQB-1200CCM / CFM	EQB-1500CCM / CFM	EQB-1800CCM / CFM	EQB-2100CCM / CFM
DIMENSION (EXT.) MM	1200 x 750 x 850	1500 x 750 x 850	1800 x 750 x 850	2100 x 750 x 850
DIMENSION (INT.) MM	715 x 575 x 575	1120 x 575 x 575	1290 x 575 x 575	1600 x 575 x 575
CAPACITY (L)	236	370	427	529
SHELVING (PCS/ SIZE)	2 / 330 x 559 (MM)	2 / 483 x 559 (MM)	2 / 635 x 559 (MM)	3/ 526 x 559 (MM)
WEIGHT (KG)	84	90	96	102
REFRIGERANT	R290	R290	R290	R290
TEMPERATURE (°C)	(C) 0~ 5 (F) -15 ~ -18	(C) 0~ 5 (F) -15 ~ -18	(C) 0~ 5 (F) -15 ~ -18	(C) 0~ 5 (F) -15 ~ -18
POWER INPUT	248 W	250 W	252 W	254 W
ENERGY CONSUMPTION (kWh/ 24h)	(C) 3 (F) 4	(C) 3.5 (F) 5.2	(C) 4 (F) 6	(C) 4.5 (F) 7
VOLTAGE/ FREQUENCY	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
STANDARD FEATURES	- Magnetic Solid Door - Auto Defrost - Digital Controller - Stainless Steel 430 - Swivel Castor (Front with Brake) - Compressor Part at right side (left side upon request) - Use 13A socket only BULLET FEET (ADD ON CHARGES)			



*Energy consumption was tested in testing lab.** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL (T&C APPLY)



S/STEEL COUNTER CHILLER / FREEZER (SPECIAL UNIT)

i-max



*All photos shown for reference purposes only.

CHILLER

FREEZER

MODEL	YD-1200CCM	YD-1200CFM
DIMENSION (EXT.) MM	1200 x 750 x 800	1200 x 700 x 800
CAPACITY (L)	290	205
SHELVING (PCS)	2 (390 x 578 MM)	2 (390 x 528 MM)
WEIGHT (KG)	68	68
REFRIGERANT	R134	R290
TEMPERATURE (°C)	0 ~ 8	(F) -10 ~ -18
VOLTAGE/ FREQUENCY (V/Hz)	220-240/50Hz	220-240/50Hz
ENERGY CONSUMPTION (kWh/ 24h)	2.25	4
STANDARD FEATURES	• Magnetic Solid Door • Auto Defrost • Digital Controller • Stainless Steel 430 • All with 2 Swivels (Front with Brake) • 13A Socket Only • Compressor Part Left Side	



** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

CHEST FREEZER SERIES

Suitable for meats, drinks, sauce, vegetables and etc.



i·max



Solid Door (Manual Defrost)
BD (W) 327, BD (W) 520, BD (W) 600

Glass Door (Manual Defrost)
CG-GC SCSD516B
HT-CF700SD



COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

*All photos shown for reference purposes only.

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL (T&C APPLY)



CHEST FREEZER SERIES

i-max



HT-CF350W



BD (W) 520 / BD (W) 600

*All photos shown for reference purposes only.

MODEL	HT-CF350W	CG-BD (W) 520	CG-BD (W) 600
DIMENSION (EXT.) MM	1104 x 670 x 830	1600 x 760 x 830	1800 x 760 x 830
DIMENSION (INT.) MM	(742+220) x 478 x (614,325)	(1145+300) x 550 x (620,340)	(1345+300) x 545 x (625,345)
GROSS CAPACITY (L)	350	520	600
BASKET	1	1	1
REFRIGERANT	R600a	R290	R290
TEMPERATURE (°C)	-18 ~ -21	-18 ~ -21	-18 ~ -21
VOLTAGE/ FREQUENCY	240V/ 50Hz	220-240V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION	1.58 kWh/ 24h	2.19 kWh/ 24h	2.69 kWh/ 24h
WATTAGE (W)	130	245	260
AMPERE (A)	1.1	2.0	2.1
STANDARD FEATURES	- Air Cooler Piping System (Manual) 13A Socket Only - Lockable Solid Door - Thermostat Controller - Adjustable Thermostat		

Wire Length: 1.38m



** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL (T&C APPLY)



GLASS TOP CHEST FREEZER SERIES (SLIDING DOOR)

i-max



CG-SC/SD(W)-516B



HT-CF700SD

***Not suitable for storing dairy ice cream.**

**All photos shown for reference purposes only.*

MODEL	CG-GC SCSD516B	CG-HT-CF700SD
DIMENSION (EXT.) MM	1634 x 653 x 900	1824 x 653 x 900
GROSS CAPACITY (L)	516	700
WEIGHT (KG)	50	60
BASKET	4	8
REFRIGERANT	R290	R290
TEMPERATURE (°C)	-18 ~ -21	0 ~ 10°C & ≤ -18°C
VOLTAGE/ FREQUENCY (V/Hz)	240V/50Hz	220V/50Hz
ENERGY CONSUMPTION (kWh/ 24h)	3.2	3.8
WATTAGE (W)	280	450
AMPERE (A)	2.5	2.9
STANDARD FEATURES	- Air Cooler Piping System (Manual Defrost) - Non-Heater Glass (may form water condensation) - Adjustable Thermostat - Lockable Glass Door - LED Light (No On/Off Switch) Wire Length: 1.38m	- Air Cooler Piping System (Manual Defrost) - Non-Heater Glass (may form water condensation) - Digital Temperature Thermostat - Energy Saving LED Light - Dual Temperature Setting - Lockable Glass Door Wire Length: 1.38m

** All sizes +/- 3mm **



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250


Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR Manufacturer + 3 year compressor warranty(T&C APPLY)




ISLAND FREEZER (MANUAL DEFROST)

HT-IF500MG

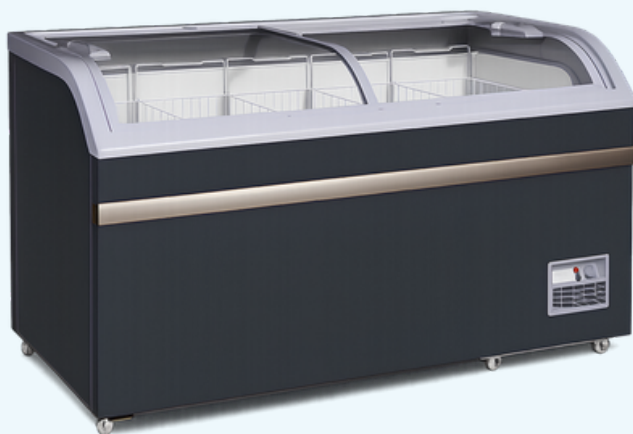

HT-IF700MG

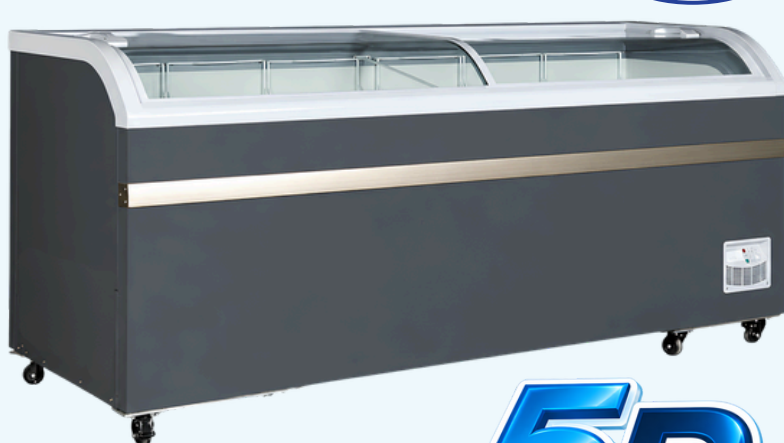

DUAL TEMPERATURE



*All photos shown for reference purposes only.

MODEL	HT-IF500MG	HT-IF700MG
DIMENSION (EXT.) MM	1475 x 757 x 858	2000 x 757 x 858
DIMENSION (INT.) MM	1320 x 605 x 485	1845 x 605 x 485
GROSS CAPACITY (L)	500L	700L
INPUT POWER (W)	408W	530W
RATED CURRENT (A)	2.4	3.5
BASKET (PCS)	5 pcs (FULL)	6 pcs (FULL)
DEFROST TYPE	MANUAL	
REFRIGERANT	R290 (ENERGY SAVING GAS)	
TEMPERATURE (°C)	8 ~ -22°C (25°C , 60%RH)	
VOLTAGE/ FREQUENCY (V/Hz)	220-240V / 50Hz	
ENERGY CONSUMPTION (kWh/ 24h)	3.64	4.72
STANDARD FEATURES	• Piping System (Manual Defrost) • LED Light Energy Saving • Thermostat Controller • Left & Right Sliding for Easy Refill • High-Density Polyurethane Foam (Cyclopentane) • Low-E Tempered Glass (may cause water condensation) • Dual Temperature Function (Chiller OR Freezer) • With Lock Function	



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR Manufacturer + 3 year compressor warranty(T&C APPLY)




ISLAND FREEZER (AUTO DEFROST)



BODY TYPE



END UNIT

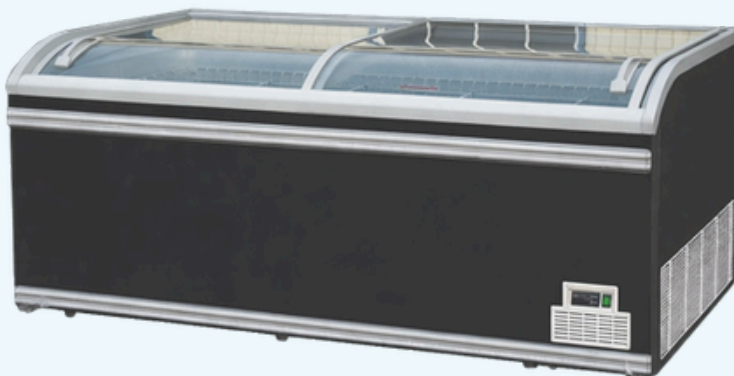

*All photos shown for reference purposes only.

MODEL	HG-IF186ADA (END)	HG-IF186ADZ (BODY)	HG-IF210ADZ (BODY)
DIMENSION (EXT.) MM	1865 x 875 x 810	1865 x 875 x 860	2105 x 875 x 860
DEFROST TYPE	AUTO (FROST-FREE)	AUTO (FROST-FREE)	AUTO (FROST-FREE)
GROSS VOLUME (L)	650L	750L	950L
RATED POWER (W)	550W	550W	560W
BASKET (PCS)	4	4	4
REFRIGERANT	R290 (ENERGY SAVING GAS)		
TEMPERATURE (°C)	-18~-22°C (25°C , 60%RH, air flow≤0.2m/s)		
VOLTAGE/ FREQUENCY (V/Hz)	220V/50Hz		
AMPERE (A)	2.2A	2.2A	2.3A
ENERGY CONSUMPTION (kWh/ 24h)	8.1	8.5	9.7
STANDARD FEATURES	• Auto Defrost (Frost-Free) • LED Light Energy Saving • Digital Temperature Controller • Left & Right Sliding for Easy Refill • Insulation Thickness: 70 mm High-Density Polyurethane Foam (Cyclopentane)		



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

SPECIAL SERIES



OPEN CHILLER



COUNTER CHILLER/FREEZER
WITH DRAWER



FLAT MEAT CHILLER



COMBINED ISLAND
FREEZER



(Back View)

4 DOOR UPRIGHT CHILLER
WITH BACK DOOR



CAKE SHOWCASE



CHILLER FREEZER WITH
CUSTOMIZED DRAWER



4 DOOR DISPLAY CHILLER



WALK-IN COLD ROOM
PORTABLE COLD ROOM
COMBINE COLD ROOM

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL (T&C APPLY)



PLUG-IN OPEN MULTIDECK CHILLER SERIES

i-max



*All photos shown for reference purposes only.

MODEL	GLX-OC2000
DIMENSION (EXT.) MM	2000 x 750 x 2000
DIMENSION (INT.) MM	1936 x 650 x 1200
CAPACITY (L)	1510
SHELVING (PCS)	8
WEIGHT (KG)	285
REFRIGERANT	R404a
TEMPERATURE (°C)	3 - 10
VOLTAGE/ FREQUENCY (V/Hz)	220V/50Hz
ENERGY CONSUMPTION (kWh/ 24h)	27 kw /24H
WATTAGE (W)	1960
STANDARD FEATURES	• Air Cooler Blower System (Auto Defrost) • Using Drain Pipe (Water Outlet) • Non-Heater Glass (may naturally form water condensation in high-humidity environments (75%+))



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.powercool.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL (T&C APPLY)



**All photos shown for reference purposes only.*



ICE BLOCK UPRIGHT FREEZER (PIPING SYSTEM)

DIMENSION (EXT) MM	858 x 692 x 2040 mm
DIMENSION (INT) MM	732 x 42mm
EACH TIER HEIGHT	14.8mm
TOTAL ICE BLOCK	32 Unit
TEMPERATURE (°C)	-10 ~ -22
DEFROST TYPE	MANUAL DEFROST

**100% COPPER PIPE*



WALL-MOUNTED REFRIGERATOR (SWING DOOR OR SLIDING DOOR)

DIMENSION (EXT) MM	1505 x 570 x 1000mm
DIMENSION (INT) MM	1400 x 450 x 630mm
MATERIAL	430 or 304 S/STEEL
REFRIGERANT	R290 Energy Saving Gas
TEMPERATURE (°C)	0 ~ 10 or -10 ~ -18
DEFROST TYPE	AUTO DEFROST



CHEF BASE REFRIGERATOR (CHILLER OR FREEZER)

DIMENSION	CUSTOM SIZE AVAILABLE
VOLTAGE	220-240V / 50Hz
MATERIAL	430 or 304 S/STEEL
REFRIGERANT	R290 Energy Saving Gas
TEMPERATURE (°C)	0 ~ 10 or -10 ~ -18
DEFROST TYPE	AUTO DEFROST

**Customize Product, Order lead time 14-25 days*



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.powercool.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL (T&C APPLY)



**All photos shown for reference purposes only.*

UNDERCOUNTER CHILLER / FREEZER (4 / 6 DRAWER)



DIMENSION (EXT) MM	1.2 / 1.5 / 1.8 / 2.1 meter
MATERIAL	430 or 304 Steel
REFRIGERANT	R290 Energy Saving Gas
TEMPERATURE (°C)	0 ~ 10 or -10 ~ -18
VOLTAGE	220-240V / 50Hz
DEFROST TYPE	Auto DEFROST



Undercounter Chiller / Freezer (Drawer & Solid Door Combo)



DIMENSION (EXT) MM	1.2 / 1.5 / 1.8 / 2.1 meter
VOLTAGE	430 or 304 Steel
MATERIAL	430 or 304 S/STEEL
REFRIGERANT	R290 Energy Saving Gas
TEMPERATURE (°C)	0 ~ 10 or -10 ~ -18
DEFROST TYPE	AUTO DEFROST



5-IN-1 STAINLESS STEEL WORKSTATION COUNTER CHILLER FREEZER WITH BASIN



DIMENSION	CUSTOM SIZE AVAILABLE
VOLTAGE	220-240V / 50Hz
MATERIAL	430 or 304 S/STEEL
REFRIGERANT	R290 Energy Saving Gas
TEMPERATURE (°C)	0 ~ 10 or -10 ~ -18
DEFROST TYPE	AUTO DEFROST

**Customize Product, Order lead time 14-25 days*



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL (T&C APPLY)



COMBINE FREEZER SERIES

i-max



*All photos shown for reference purposes only.

MODEL	HT-CBF1180
DIMENSION (EXT.) MM	1890 x 860 x 2170
TOP CAPACITY (L)	480
BOTTOM CAPACITY (L)	700
TOP SHELVINGS (PCS)	6
BOTTOM BASKET (PCS)	6
REFRIGERANT	R290
TEMPERATURE (°C)	-10 ~ -18
VOLTAGE/ FREQUENCY (V/Hz)	220V/50Hz
ENERGY CONSUMPTION (kWh/ 24h)	30 kw /24H
WATTAGE (W)	1800
STANDARD FEATURES	• Auto Defrost (Frost-Free) • Heater Glass (Top side only) ; Non-Heater Glass (Bottom side) - may cause water condensation on glass door • Digital Controller



Please note that our technical features are subject to change without prior notice.


COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

REMOTE MULTIDECK OPEN CHILLER SERIES

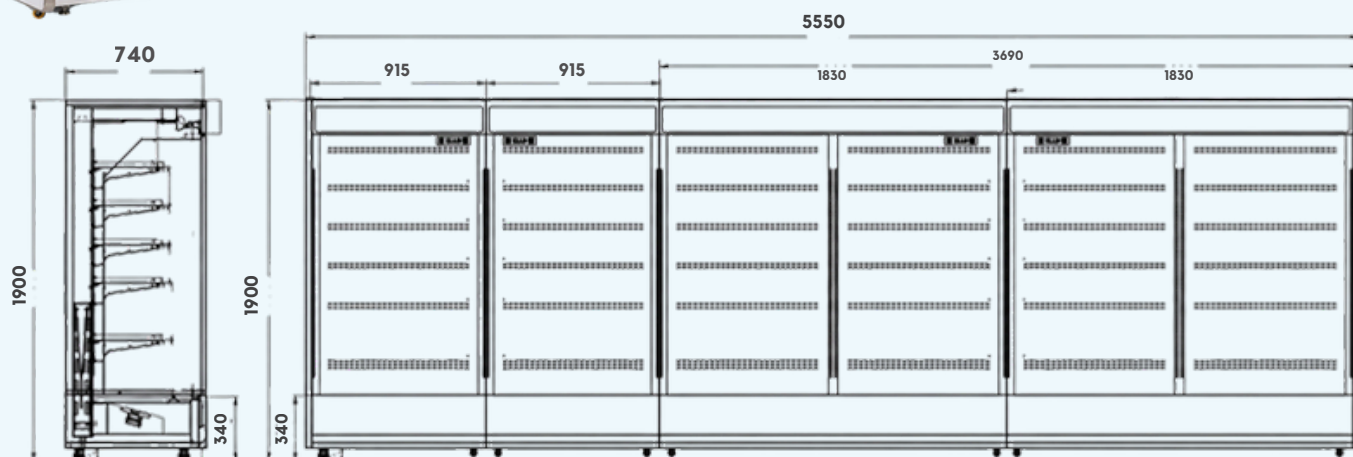

**All photos shown for reference purposes only.*

MODEL	XY-5550OC
DIMENSION (EXT.) MM	5550 x 740 x 1900 (4 sections)
VOLTAGE/ FREQUENCY (V/Hz)	380V / 50Hz
REFRIGERANT	R404a
DRAINAGE METHOD	Drain pipe
COMPRESSOR	PANASONIC
SHELVINGS (PCS)	5
TEMPERATURE (°C)	2 ~ 8
FEATURES	• Premium Designed exterior with clean, elegant lines • Precise temperature control with Electronic digital controller • Bright Energy-saving LED lighting to enhance product visibility • Adjustable shelves to suit different product display needs • Standard price tag strips for each shelvings • Imported Energy-Saving Condensing Set



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED

HI-TEN TRADING SDN BHD (709676-X)

No 12, RCI Park Jalan Kesidang 2, Kawasan Perindustrian Sungai Choh,
48200 Serendah, Selangor, Malaysia. Tel: +603 6094 1122 H/p: +6012 386 8250

Email: enquiry@powercool.com.my Website: www.imaxrefrigerator.com.my Facebook: imaxrefrigerator

1 YEAR GENERAL (T&C APPLY)



since 1979



SINGLE TANK DEEP GAS FRYER

i-max



*All photos shown for reference purposes only.

MODEL	NTP14GF		
DIMENSION (EXT.) MM	434 × 796 × 1177		
COOKING AREA	380 × 360 × 90		
OIL CAPACITY (L)	24		
IP RATING	IPX4		
GAS TYPE	Liquefied gas / Natural gas		
POWER (BTU)	70000		
HEAT EFFICIENCY	62.6%		
GAS PRESSURE (Pa)	Liquefied gas	Natural gas	
	2800	2000	
OIL FILTRATION	220-240V	50/60Hz	250W
MAX. FOOD LOAD (KG)	4.5		
EXHAUST GAS (CO ppm)	29		
STANDARD FEATURES	• 1-1/2" drain valve for rapid oil drainage to prevent clogging. • Built-in oil filtration system • Temperature range: 200-400 degrees Fahrenheit (66-204°C) • Cleaning mode, Oil melting mode		



Please note that our technical features are subject to change without prior notice.

COPYRIGHT © 2026 POWER COOL EQUIPMENTS | ALL RIGHTS RESERVED



CERTIFIED TO ISO 9001: 2015
CERT. NO. : QMS 03504



Speech by Power Cool's Managing Director, Lim Chun Siong:

I feel honored to have the opportunity to be interviewed by the renowned media, "ShangHai". Also want to share with our supporters that IMAX and HITEN brand have officially been awarded "Top Excellence Brand". With their beliefs, I believe that more people will be able to understand the history of the company. At the same time, I feel excited when promoting locally-made products throughout Malaysia because we love Malaysia.

I would like to express my sincere gratitude to all our employees, business partners and clients for your trust towards our brand. With our 31 years of experience, we have the opportunity to serve more customer by providing professional technical support and customer service. We always adhere to the management style of "people-oriented, user first, reputation first, and service society"; and constantly pursue the management concept of "management innovation, technology innovation, service innovation and brand innovation", which has opened up a broad market for the enterprise and promoted an extraordinary leap forward development of the enterprise.

It is our unremitting pursuit to create values for customers and enhance customer satisfaction; we hope to cooperate with all related parties to a win-win situation, to provide high quality products and services, to be sincere and good, to have continuous development, and to grow in opportunities and challenges.

Power Cool Equipments (M) Sdn Bhd will keep moving towards a higher, faster and stronger goal. We sincerely welcome friends at home and abroad to visit us!

Thanks again and stay safe & healthy!

